


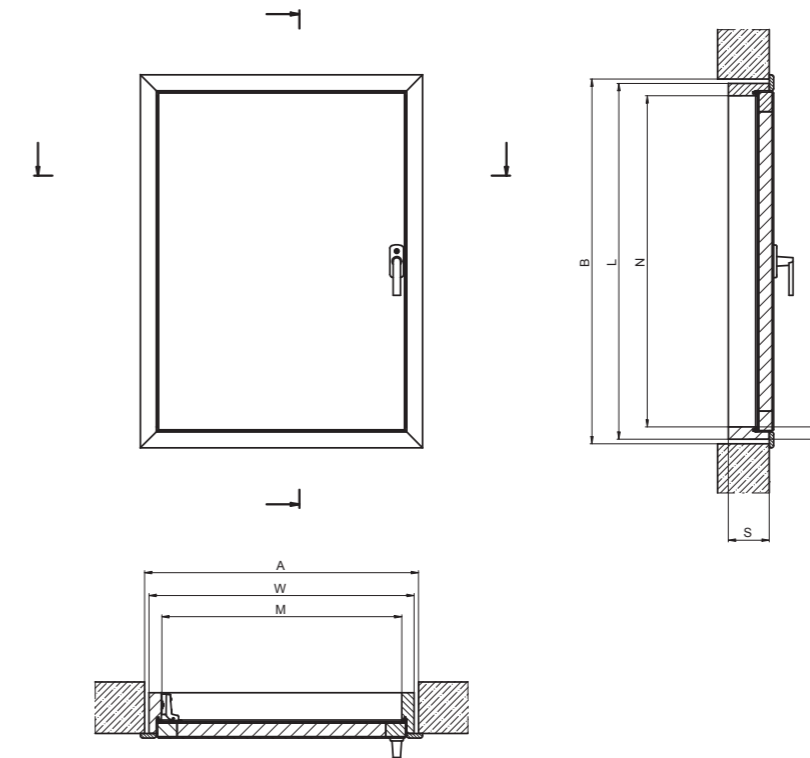
# TECHNICAL SPECIFICATION

## DWK L-SHAPED COMBINATION DOOR

DOOR TYPE	DWK
	
<b>I. APPLICATION</b>	
Installation	- fully assembled product - ready for quick installation
<b>II. FEATURES</b>	
Sash structure	Frame made of pinewood clad on both sides with HDF board and filled inside with insulation material
Sash colour	white
Opening	right or left side
Closing	universal handle with a lock
Seal	rubber
Finishing trims	3.5cm wide wooden in a natural colour
<b>III. TECHNICAL PARAMETERS</b>	
Heat transfer coefficient U*	1.1 W/m <sup>2</sup> K
Thermal insulation thickness	3 cm
Sash thickness	3.6 cm
Fire-resistance	-
Warranty	3 years

\* manufacturer's internal calculations

### IV. DIAGRAM






### V. DOOR DIMENSIONS

Opening dimensions [cm]	AxB	55x80	60x80	60x100	60x110	70x90	70x100	70x110
Door dimensions [cm]	WxL	53.4x78.4	58.4x78.4	58.4x98.4	58.4x108.4	68.4x88.4	68.4x98.4	68.4x108.4
Internal frame dimensions [cm]	MxN	48x73	53x73	53x93	53x103	63x83	63x93	63x103
Frame width [cm]	S	9						
Frame thickness [cm]	Z	27						

# TECHNICAL SPECIFICATION


## DWF, DWT

### L-SHAPED COMBINATION DOOR

DOOR TYPE	DWF	DWT
	  <p>Klasyfikacja wg EN 13501-2</p>	
	<b>FIRE-RESISTANT</b>	<b>INSULATED</b>
<b>I. APPLICATION</b>		
Installation	- fully assembled product - ready for quick installation	- fully assembled product - ready for quick installation
<b>II. FEATURES</b>		
Sash structure	Frame made of pinewood clad on both sides with HDF board and filled inside with insulation material	
Sash colour	white	
Opening	right or left side	
Closing	universal handle with a lock	
Seal	rubber and seal increasing its volume under the influence of high temperature	rubber
Finishing trims	3.5cm wide wooden in a natural colour	
<b>III. TECHNICAL PARAMETERS</b>		
Heat transfer coefficient U*	0,64 W/m <sup>2</sup> K	0,6 W/m <sup>2</sup> K
Thermal insulation thickness	6 cm	6 cm
Sash thickness	6.6 cm	6.6 cm
Class	class 4 (the highest) as per EN 12207	
Fire-resistance	EI <sub>1</sub> =45min	-
Warranty	3 years	

\* manufacturer's internal calculations

#### IV. DIAGRAM

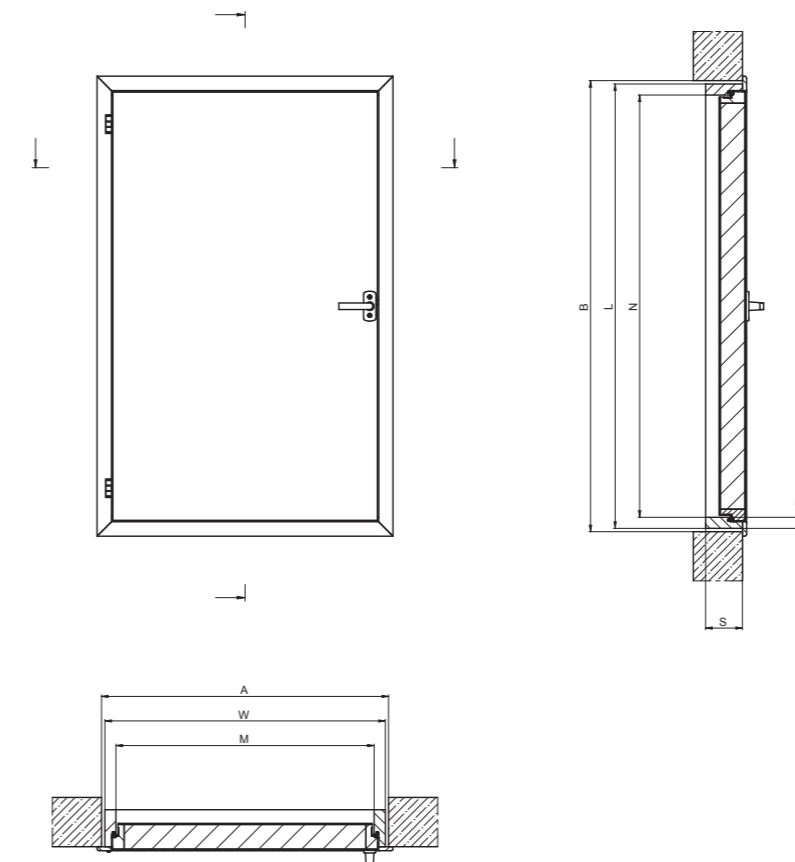

#### V. DOOR DIMENSIONS

Opening dimensions [cm]	AxB	55x80	60x80	60x100	60x110	70x90	70x100	70x110
Door dimensions [cm]	WxL	53.4x78.4	58.4x78.4	58.4x98.4	58.4x108.4	68.4x88.4	68.4x98.4	68.4x108.4
Internal frame dimensions [cm]	MxN	48x73	53x73	53x93	53x103	63x83	63x93	63x103
Frame width [cm]	S	9						
Frame thickness [cm]	Z	27						